


The combination of colors and designs allows for a truly individualized look that can be tailored to any aesthetic. The use of these tiles in any space will surely bring an air of sophistication and timelessness.

With these pieces, you can create an atmosphere that feels special to you and invites conversation and creativity.



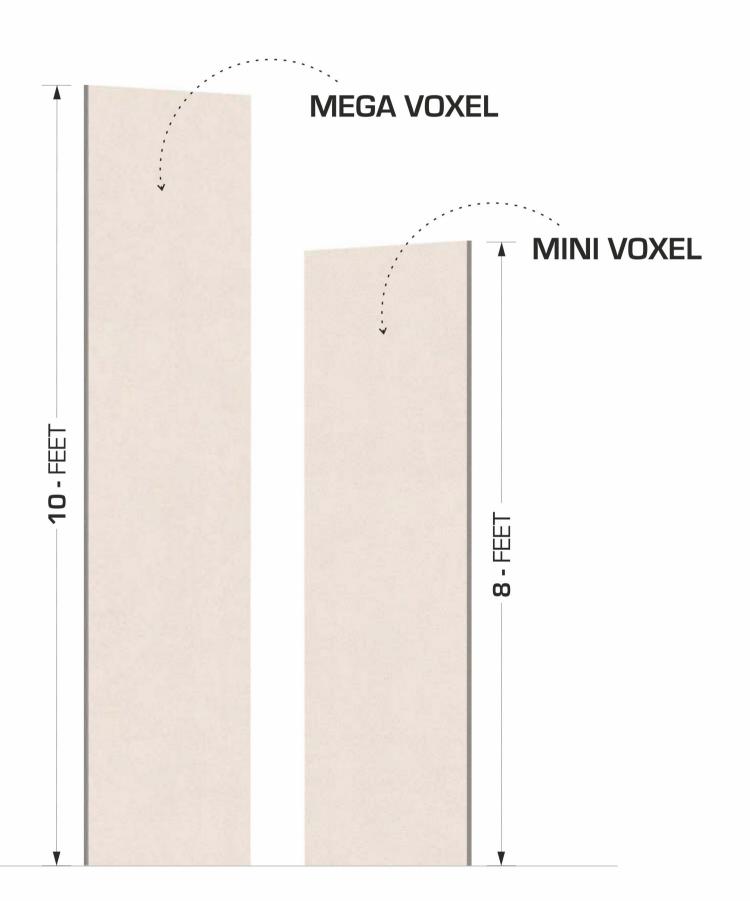

APPROPRIATE LEVEL OF SOPHISTICATION

Available Size

We have chosen for you our 800×3000 mm and 800×2400 mm size with 15 mm thickness. This size is perfect for those wanting to make a statement in any space. By choosing this size, you are guaranteed to create a beautiful atmosphere that not only fits perfectly in any room but will also invite conversation and creativity. This size is perfect for those wanting to make a bold and vibrant statement in any space.

This size enhances the aesthetic appeal of your property and promotes a cozy environment in both commercial and residential areas. We offer a wide range of beautifully crafted tiles. As a result, creating your dream space is simple.

With our different sizes, shapes, and colors to choose from, you are sure to find a tile that fits your design style. Whether you are looking to create a timeless, classic look or something more modern and sophisticated, our tiles can help you achieve your desired aesthetic.





Tile Spectrum

Our range of tiles includes a variety of colors and finishes to suit every style and budget. We specialize in producing high-quality tiles using advanced technology and sustainable practices.


Our products are known for their durability, aesthetic appeal, and ability to withstand wear and tear, making them ideal for both residential and commercial use.

■ GLOSSY ▲ MATT

→ 15mm Thickness

ELEVATE YOUR STYLE WITH **SPLENDOUR**



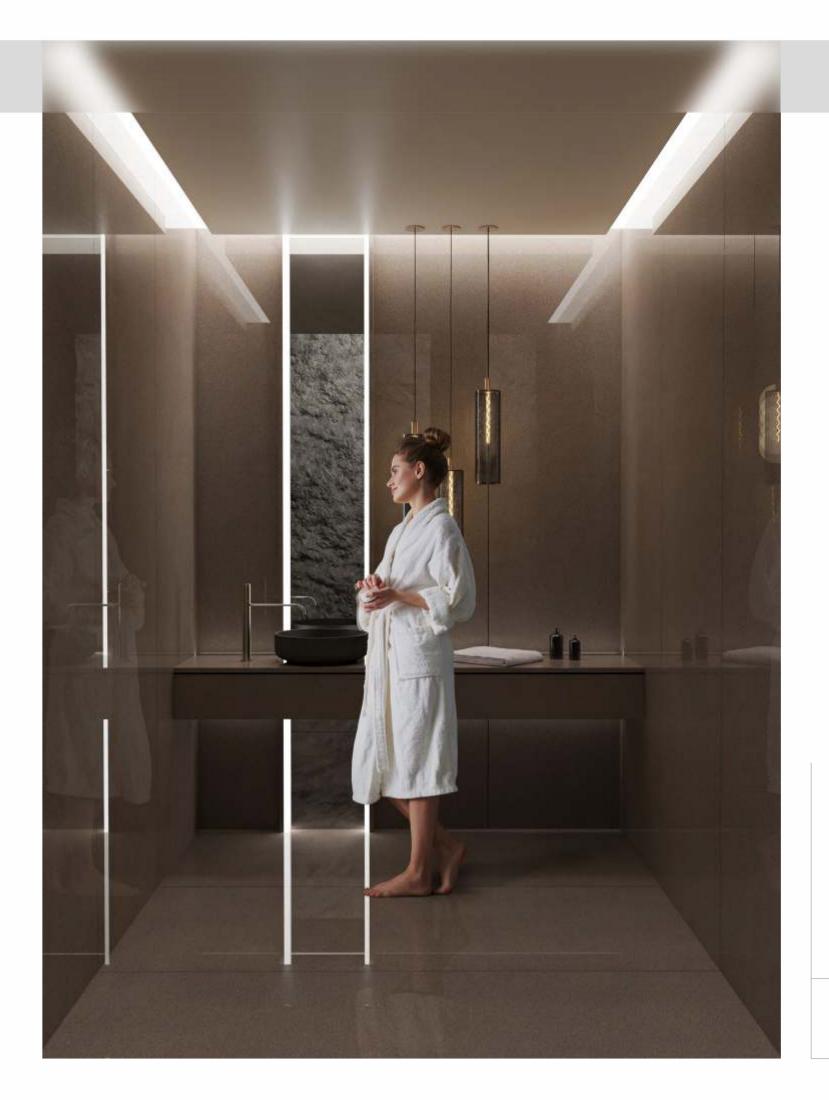







Double Bevel



Crescent



Big Bevel



Small Bevel



Top Radius

Joint Possibilities



Birds beak



45° corner



Soft corner

Edge Profile

countertops come in a variety of colors and materials, all with one thing in common: They are designed to be strong and resilient, able to withstand wear and tear over time. The cutouts of our tiles are exceptional, and the edges of these tiles are designed to offer a special sense of sophistication with a beveled design that adds a unique aesthetic to any space.


































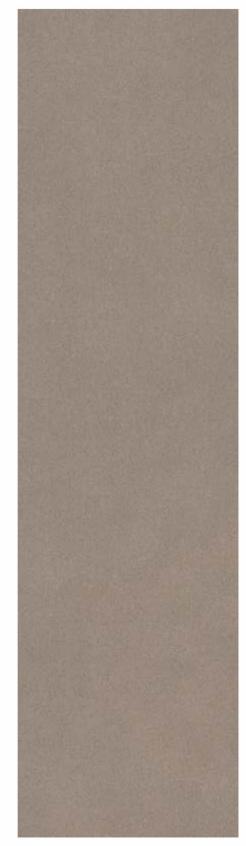







● GLOSSY ▲ MATT

♣ 15mm Thickness



MEGA VOXEL **BARLEY**

Size: 800X3000MM MINI VOXEL **BARLEY**

Size:

800X2400MM







Indoor Application

These tiles are ideal for indoor applications such as kitchen backsplashes, bathroom walls, and accent walls in living rooms or bedrooms. Their unique design and color options allow for endless possibilities in creating a stylish and modern look.

































- GLOSSY ▲ MATT
- ♣ 15mm Thickness





Size: **800X3000MM**



MINI VOXEL BIANCO
Size:
800X2400MM





























Type: **FULL BODY**

● GLOSSY ▲ MATT

♣ 15mm Thickness



MEGA VOXEL COCO

Size: **800X3000MM**

MINI VOXEL COCO
























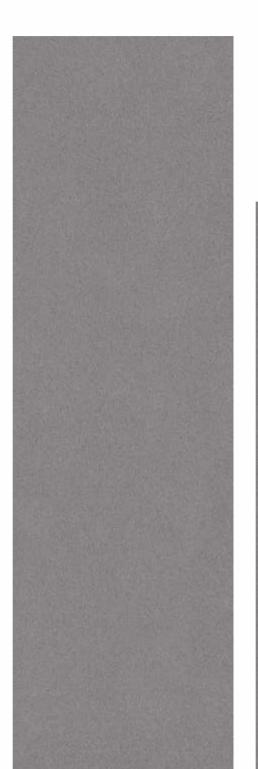







● GLOSSY ▲ MATT

♣ 15mm Thickness



MEGA VOXEL GREY

Size: **800X3000MM**

MINI VOXEL **GREY**






















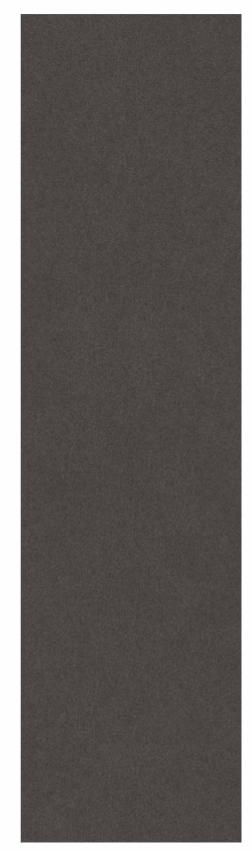




Type: **FULL BODY**

● GLOSSY ▲ MATT

♣ 15mm Thickness




MEGA VOXEL **NERO**

Size: **800X3000MM**


MINI VOXEL **NERO**





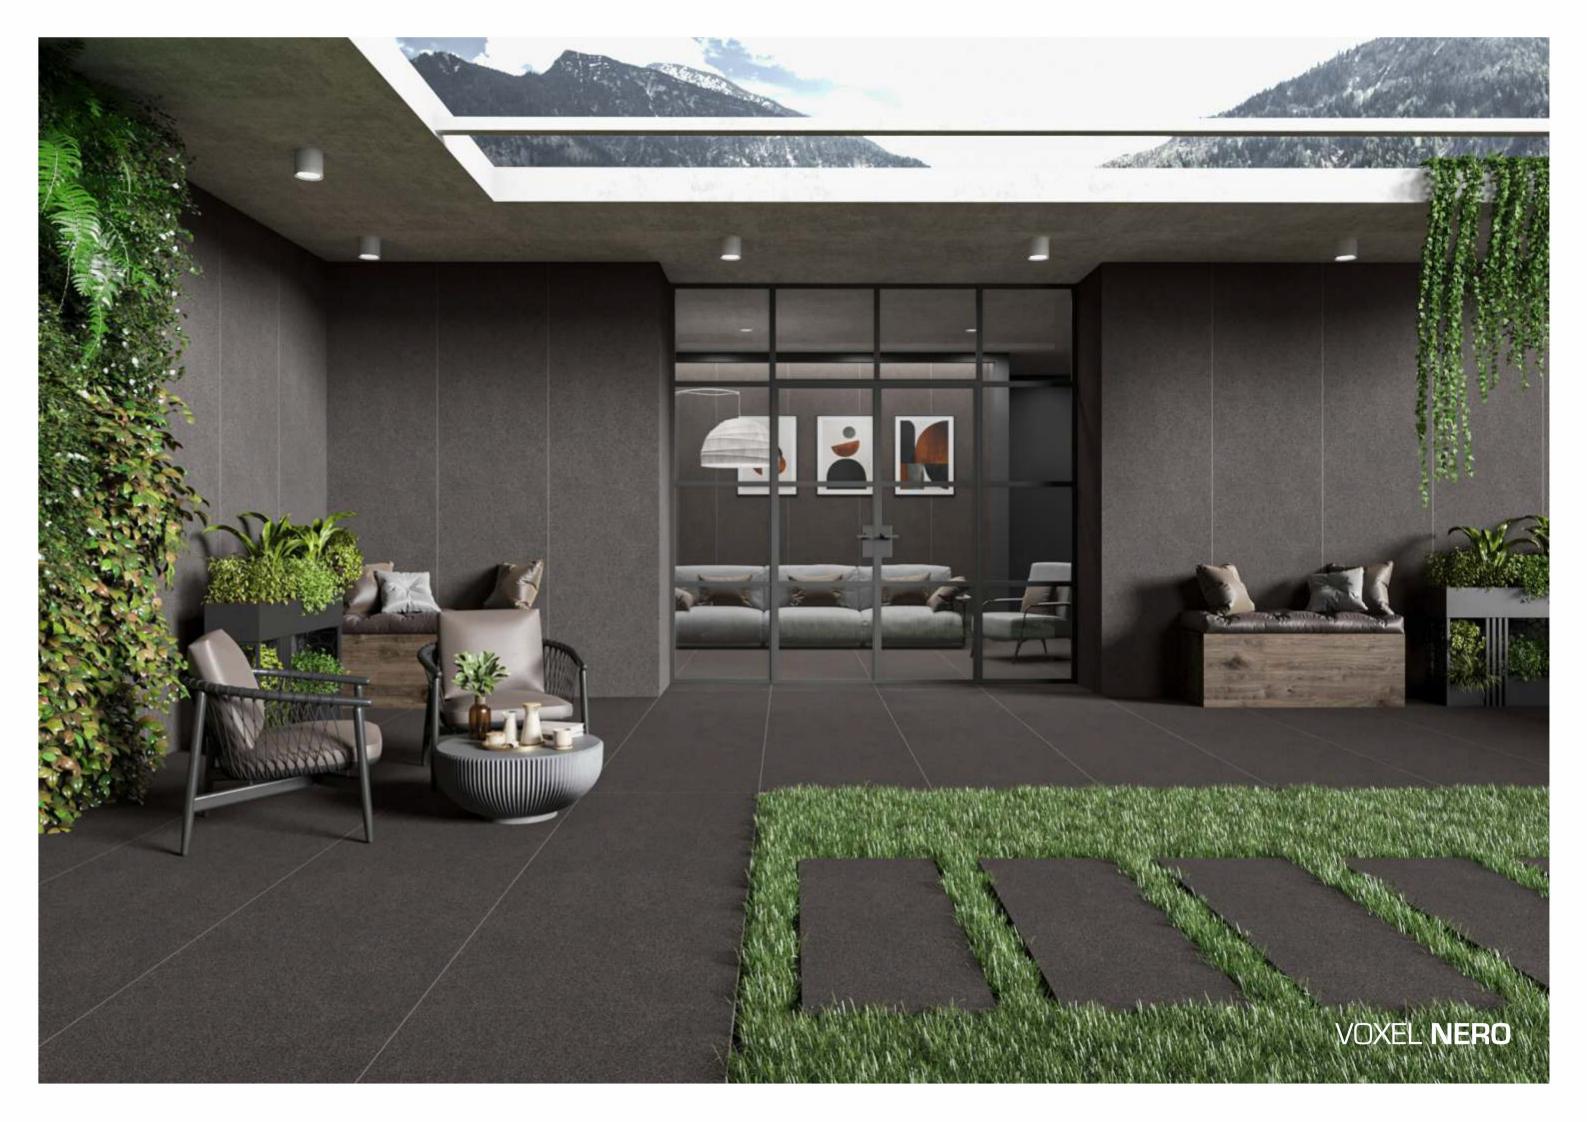

IT IS EXQUISITELY MADE WITH HIGH-QUALITY MATERIALS THAT ENSURE LONGEVITY.

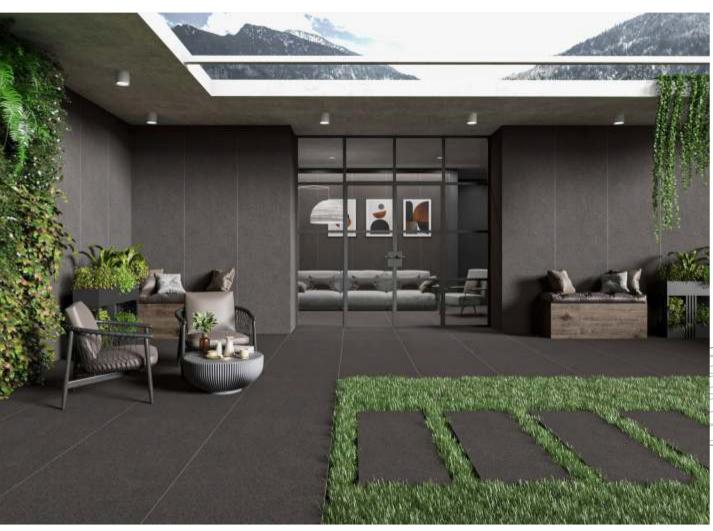



Outdoor Application

The durability of these tiles makes them suitable for outdoor applications such as patios, pool decks, and walkways. Their slip-resistant surface ensures safety, while their stunning design adds an element of elegance to any outdoor space.













Type: **FULL BODY**

● GLOSSY ▲ MATT

♣ 15mm Thickness



MEGA VOXEL WHITE

Size: **800X3000MM**

MINI VOXEL WHITE











DISCOVER MIRACULOUS CHARACTERISTICS

Specific Attributes


Combining aesthetic quality and versatility, this tile provides a unique way to liven up any living space. With their diverse range of textures and colors, these tiles create a visually stimulating atmosphere that adds sophistication and character to any space. Not only do they bring a unique flair to any residential or commercial setting, but they are also extremely durable.




Easy to install




Antislip




Easy to clean



Highly resistant



High tensile strength.





Stress-resistant.

MANUALLY TRANSPORTING **TILES**


Only for 1/4" Slabs


MOVING A TILE





RAISING A IMMODERATE TILE ONTO A BENCH









✓ CORRECT

HANDLING IMMODERATE TILE FOR WALL









WORKING WITH THE VARIOUS VERSIONS OF TILES

CUTTING WITH DIAMOND DISCS





Our products can be cut using diamond discs fitted onto the hand-held electrical grinding machine. The speed of Disc rotation must be high (>10000 RPM) and should have a low feed rate (< 1 m/min). Itmay be required to cool the disc with water. Recommended discs are the thin typesgenerally used for cutting porcelain stoneware. The surface should be kept on a FLAT base while cutting without any gap underneath

DRILLING





You can use cutting discs fitted to battery-operated screwdrivers or angle grinders, electrical drills as an alternative.

INTERNAL CUT / L-SHAPED CUT



To get internal and L-shaped corners & to reduce the risk of breakage. round o the vertex of the internal corner using bits with a radius of at least 5mm. Then cut with diamond discs, be cautious to stop moving the cutting tool forward. To drill and cut using diamond discs, follow the instructions provided above.

When using these tools:
-Cool the point being drilled with water


-Cool to put too much pressure and bear in mind the resistance of the type of laminated stoneware you are working on


-If you are using tungsten bits, start drilling at a low speed

-If you are using drills or screwdrivers, do not select hammering mode

EDGE-FINISHING








INSTRUCTIONS FOR MANUAL INSTALLATION

SINGLE LAYER METHOD

DOUBLE-LAYER METHOD

COMPRESSING THE TILE







IMPORTANT

All cutout corners must have a minimum diameter of 1/4". Never leave 90° angles. We recommend radiuses of more than 1/4" when the kitchen the design allows as it makes the countertop firmer.













X INCORRECT X INCORRECT

X INCORRECT

CLEANING & MAINTENCE

Our products are non porous (due to their high quality raw materials, stringent production parameters and state of the art technology), hence any dust or deposited waste cannot penetrate the surface.

For most cases only a damp cloth is sufficient for cleaning.

Regular cleaning highlights the aesthetic features of the surface and gives it exceptional shine.

For highly aggressive cleaning caused by some common food and substances follow the table below.

TYPE OF STAIN	CHEMICAL PRODUCT	EXAMPLE	
Grease	Alkaline - Solvent	Detergent	
Oil	Solvent	Ammonia, Backing Soda	
Ink	Oxidant - Solvent	Alcohol, Liquid Bleach, Nail Paint Remover	
Rust	Acid	Hydrochloric Acid, Vinegar, Red Harpic	
Lime	Acid	Descaling Reagent, Hydro Chloric Acid	
Cement	Acid	Hydro Chloric Acid	
Wine	Alkaline	Ammonia, Liquid Bleach	
Coffee	Alkaline - Solvent	Ammonia, Liquid Bleach	
Rubber	Solvent	Alcohol, Thinner	
Plaster	Acid	Hydro Chloric Acid	
Candle Wax	Solvent	Alcohol, Thinner	
lodine	Oxidant	Liquid Bleach	
Blood	Oxidant	Liquid Bleach	
Ice Cream	Alkaline	Liquid Bleach	

Note: It is recommended that any kind of stain needs to get clean immediately / as soon as possible.

TECHNICAL SPECIFICATIONS

CHARACTERISTIC	STANDARD AS PER ISO-13006/2018 En14411 gr.bla	VALUE	TEST METHOD
	Regulatory Proper	ties	·
Deviation in Length & Width	<u>+</u> 0.5%	<u>+</u> 0.2%	ISO 10545-2
Deviation in Thickness	<u>+</u> 5%	<u>+</u> 5%	ISO 10545-2
Straightness of Sides	<u>+</u> 0.5%	<u>+</u> 0.2%	ISO 10545-2
Rectangularity	<u>+</u> 0.5%	<u>+</u> 0.2%	ISO 10545-2
Surface Flatness	<u>+</u> 0.5%	<u>+</u> 0.3%	ISO 10545-2
Colour Difference	ΔE<1.00	△E<0.30	ISO 10545-16
Glossiness	As per Mfg.	As Per Mfg.	GlossMeter
	Structural Propert	ies	·
Water Absorption	≤0.5 %	≤0.3 %	ISO 10545-3
Apparent Density	As Per Mfg.	>2.20 g/cc	ISO 10545-3
	Massive Mechanical Pr	roperties	
Modulus of Repture	Min.35N/mm²	Min.40N/mm²	ISO 10545-4
Breaking Strength	Min. 1300 N	Min. 5000 N	ISO 10545-4
Impact Resistance	As per Mfg.	Min. 0.55	ISO 10545-4
	Surface Mechanical Pr	operties	
Surface Abrasion Resistance	As per Mfg.	Min. class 3	ISO 10545-7
Moh's Hardness	As per Mfg.	Min. class 4	BS EN 15771
	Thermo Hygrometric Pı	roperties	
Frost Resistance	As Per Mfg.	Frost Proof	ISO 10545-12
Thermal Shock Resistance	Min. 10 Cycle	Min. 10 Cycle	ISO 10545-9
Moisture Expansion	Max. 0.6mm/m	Max. 0.02mm/m	ISO 10545-10
Thermal Expansion	Max. 9.0 x 10 ⁻⁶	Max. 6.0x10 ⁻⁶	ISO 10545-8
	Chemical Propert	ies	
Chemical Resistance	As Per Mfg.	No Damage	ISO 10545-13
Stain Resistance	Resistant	Resistant	ISO 10545-14
	Safety Propertie	s	
Slip Resistance	As per Mfg.	N. A.	DIN 51130
Fire Resistance	As per Mfg.	Fire Proof	N. A.

PACKING DETAILS

Dimension (mm)	No. of PC's/Box	Square Feet	Weight (Approx)
800x3000mm	1 Pcs.	25.83 Sq. Feet	83 Kg.
800x2400mm	1 Pcs.	20.67 Sq. Feet	68 Kg.