



LiveStone  
CERAMIC



200 X 1200 MM

[www.livestoneceramic.com](http://www.livestoneceramic.com)





NAUNCE

SERIES



by



LiveStone  
CERAMIC



# THE FINEST WOODWORK FOR THE FINEST LIVING.

Experience the calmness and elegance  
of nature from the comfort of your own home.  
Discover the strength, textures, and tones  
that wood has to offer. The collection of  
200x1200mm tiles is everything different  
you were looking for.

**2 0 0 X**

**1 2 0 0 M M**

[www.geogres.in](http://www.geogres.in)



WOODS ARE  
FLOORING  
ARE WOODS.

ALL  
ARE  
FLOORING  
ALL

FIND  
CREATIVITY  
FROM BASICS.







ITS  
NAUNCE  
SAND

GRIS

SAND





# NAUNCE GRIS

200X  
1200MM

RANDOM  
14







# NAUNCE GRIS

200X  
1200MM

RANDOM  
14







# NAUNCE SAND

200X  
1200MM

RANDOM  
14





# NAUNCE SAND


200X  
1200MM

RANDOM  
14





LAYING SOLUTIONS

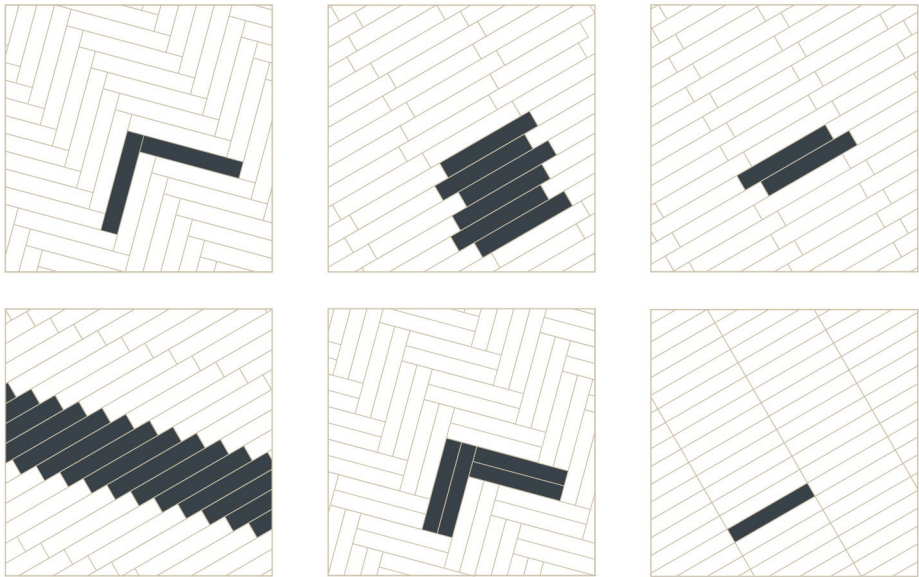


The material should be carefully checked before fixing, especially tonality, caliber and choice. Claims cannot be accepted once the material is installed. The company declines all responsibility for laying without joints; minimum joint laying has a gap of 2 mm.

PORCELAIN STONEWARE - STANDARD EN 14411 (ISO 13006)  
ANNEX G GROUP BIA, E 0.5%

TECHNICAL SPECIFICATIONS			STANDARDS	VALUES REQUIRED	OUR VALUES
				RECTIFIED	MATT
DIMENSIONS		Length and width	ISO 10545-2	± 0,3%, max 1 mm	In According
		Thickness		± 5%, max 0,5 mm	In According
		Wedging		± 0,3%, max 1,5 mm	In According
		Straightness of the edges		± 0,3%, max 0,8 mm	In According
		Flatness		± 0,4%, max 1,8 mm	In According
STRUCTURE		Water absorption - average value %	ISO 10545-3	≤ 0,5%	In According
		Breaking strength	ISO 10545-4	S ≥ 1300 N	S ≥ 2000 N
		Modulus of rupter		R ≥ 35 N/mm²	In According
		Resistance to surface abrasion	ISO 10545-7	According to classification indicater by manufacture	PEI IV
THERMAL SHOCK		Coefficient of thermal linear expansion	ISO 10545-8	9 x 10 <sup>-4</sup> max	In According
		Thermal shock resistance	ISO 10545-9	Resistant	Resistant
		Resistance to frost	ISO 10545-12	Resistant	Resistant
SAFETY		Dynamic friction coefficient	DIN 51130	According to the space or the working area	R9
CHEMICAL RESISTANCE		Resistance to high concentrations of acids and alkalis	ISO 10545-13	Class GHC Min.	Class GHA
		Resistance to low concentrations of acids and alkalis		Class GLC Min.	Class GLA
		Stain resistance	ISO 10545-14	Min. class 3	5



INSTALLATION ADVICE

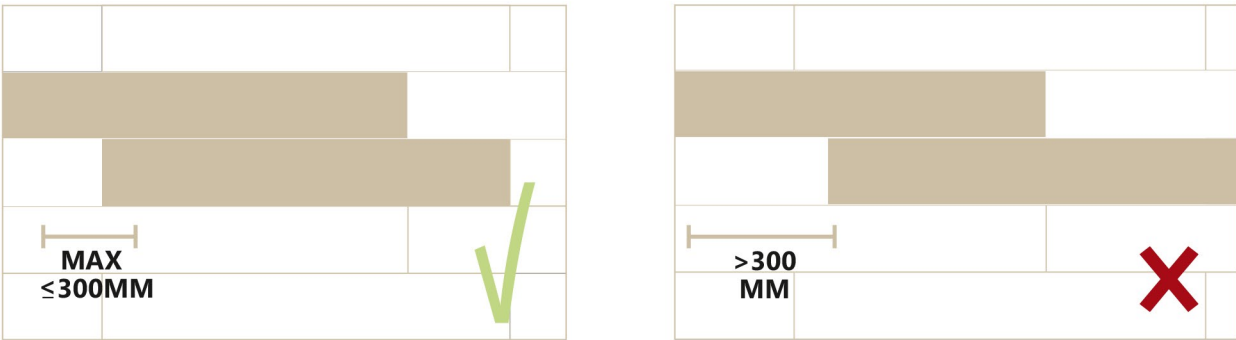

The longest side should be staggered no more than 300mm when laid in running bond.

V SHADES



The V-Shade classification indicates the level of shading of the product, ranked from V0 to V4.

PACKAGING

SIZE	THICKNESS	PCS./BOX	SQM/BOX	SQF/BOX
200x1200 mm	9 MM	5	1.20	12.91

FEATURES







**LiveStone**  
CERAMIC

**LIVESTONE CERAMIC PVT LTD**

Survey No.394 P3/P1, B/H-Livacity Ceramic,  
Nr. Rangpar, Jetpar Road, Dist. Morbi 363642 (Gujarat) INDIA

**E-mail**

info@limestoneceramic.com  
export@limestoneceramic.com

**Website**

www.limestoneceramic.com

**Customer Care**

+91 99786 03232

**Follow Us**

